

Filename: LTO-150-18-30-RJ45-80-NL_rep

Manufacturer: Aquarii

Luminaire: Stage Light

Luminaire Cat: Model: Lieto - 18 Degree Beamspread - 150 Watts - 3000K White Light

Lamp: LED

Lamp Output: 1 lamp, total luminaire Lumens: 11949.3

Max Candela: 102,570.9 at Horizontal: 0°, Vertical: 0°

Input Wattage: 157.2

Luminous Opening: Circular (Dia: 11.04")


Test Lab: Intertek

Photometry : Type C

CIE Class: Direct

Cutoff Class: Full Cutoff

Nema Type: 3 X 3


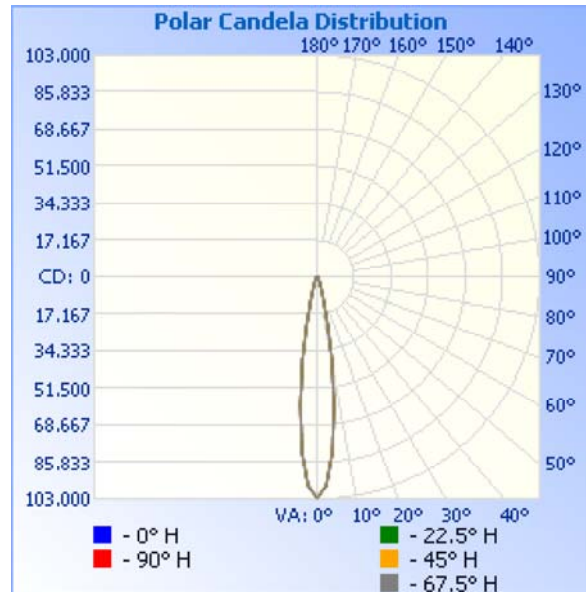


Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	11,259.5	94.2%
0-40	11,695.2	97.9%
0-60	11,948.7	100%
60-90	0.6	0%
70-100	0	0%
90-120	0	0%
0-90	11,949.3	100%
90-180	0	0%
0-180	11,949.3	100%

Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	6,244.1	52.3%	90-100	0	0%
10-20	3,899.4	32.6%	100-110	0	0%
20-30	1,116.1	9.3%	110-120	0	0%
30-40	435.7	3.6%	120-130	0	0%
40-50	191.9	1.6%	130-140	0	0%
50-60	61.6	0.5%	140-150	0	0%
60-70	0.6	0.0%	150-160	0	0%
70-80	0	0.0%	160-170	0	0%
80-90	0	0.0%	170-180	0	0%

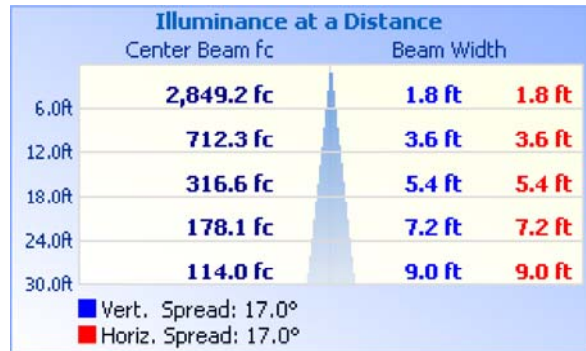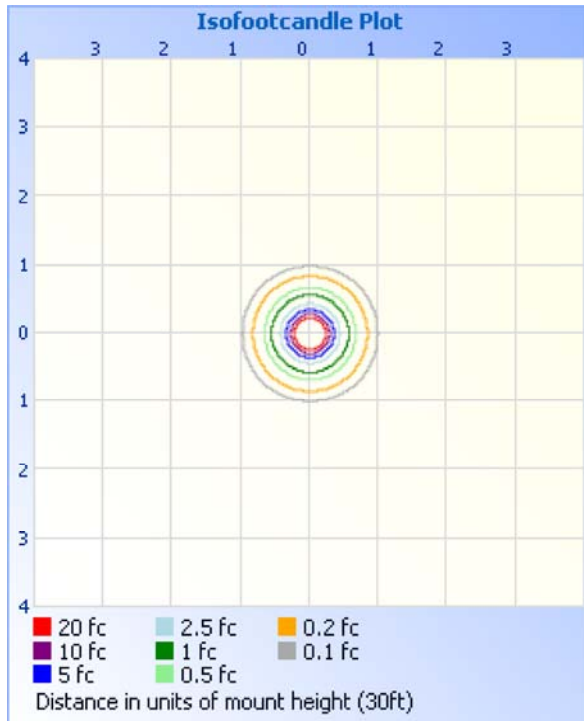

Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance: 20%

RCC %:	80				70				50				30			10			0
RW %:	70	50	30	0	70	50	30	0	50	30	20	50	30	20	50	30	20	0	
RCR: 0	1.19	1.19	1.19	1.19	1.16	1.16	1.16	1.00	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00	
1	1.15	1.13	1.12	1.10	1.13	1.11	1.10	.98	1.07	1.06	1.05	1.04	1.03	1.02	1.00	1.00	.99	.97	
2	1.12	1.09	1.06	1.04	1.10	1.07	1.05	.95	1.04	1.02	1.00	1.01	1.00	.98	.99	.97	.96	.95	
3	1.09	1.05	1.01	.99	1.07	1.03	1.00	.93	1.01	.99	.97	.99	.97	.95	.97	.95	.94	.92	
4	1.06	1.01	.98	.95	1.05	1.00	.97	.91	.98	.96	.93	.96	.94	.92	.95	.93	.91	.90	
5	1.03	.98	.95	.92	1.02	.97	.94	.89	.96	.93	.91	.94	.92	.90	.93	.91	.89	.88	
6	1.01	.95	.92	.89	1.00	.95	.91	.87	.94	.91	.88	.92	.90	.88	.91	.89	.87	.86	
7	.99	.93	.89	.87	.98	.92	.89	.85	.91	.88	.86	.90	.88	.86	.90	.87	.85	.84	
8	.97	.91	.87	.85	.96	.90	.87	.84	.89	.86	.84	.89	.86	.84	.88	.85	.84	.83	
9	.95	.89	.85	.83	.94	.88	.85	.82	.88	.85	.83	.87	.84	.82	.86	.84	.82	.81	
10	.93	.87	.84	.81	.92	.87	.83	.80	.86	.83	.81	.85	.83	.81	.85	.82	.81	.80	

Luminaire Report Summary

IESNA:LM-63-2002
 [TEST]
 [TESTLAB] Intertek
 [ISSUEDATE] 10/03/2018
 [MANUFAC] Aquarii
 [LUMCAT] Model: Lieto - 18 Degree Beamspread - 150 Watts - 3000K White Light
 [LUMINAIRE] Stage Light
 [LAMP] LED
 [_TOTALLUMINAIRELUMENS] 11949.3
 [USER DEFINED] 120.03 AC, 1315.8 MA, 154.28 W, 0.9952 PF

FILE: CREATED USING ABSOLUTE PHOTOMETRY
 FILE: CANDELA MULTIPLIER: 1
 FILE: VERTICAL ANGLES: 73, HORIZONTAL ANGLES: 17
 FILE: COORDINATE SYSTEM: TYPE C
 FILE: UNIT OF MEASURE: STANDARD
 FILE: BALLAST FACTOR: 1

Photometrics Pro 1.3.28 copyright 2003-2018 by jSolutions, Inc.
 Reported data calculated from manufacturer's data file, based on IES recommended methods.